



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number: **0 668 668 A1**

12

# EUROPEAN PATENT APPLICATION

21 Application number: 95101796.1

51 Int. Cl.<sup>6</sup>: H04B 7/26, H04B 7/06

22 Date of filing: 09.02.95

30 Priority: 16.02.94 JP 19365/94  
06.09.94 JP 212434/94

43 Date of publication of application:  
23.08.95 Bulletin 95/34

84 Designated Contracting States:  
DE FR GB

71 Applicant: MATSUSHITA ELECTRIC  
INDUSTRIAL CO., LTD.  
1006, Oaza Kadoma  
Kadoma-shi  
Osaka (JP)

72 Inventor: Hayashi, Masaki  
749-1-G261, Saedocho,  
Tsuzuki-ku  
Yokohama-shi (JP)  
Inventor: Miya, Kazuyuki  
2612-28, Kanaimachi  
Machida-shi (JP)  
Inventor: Kato, Osamu  
14-10-205, Hiyoshi-2-chome,  
Kohoku-ku  
Yokohama-shi (JP)

74 Representative: Patentanwälte Leinweber &  
Zimmermann  
Rosental 7/II Aufg.  
D-80331 München (DE)

54 Mobile CDMA/TDD telecommunication system with transmission antennas selection means.

57 In a base station having a plurality of antennas (101, 201), each of comparison circuits (301, 401) operates to compare correlation levels, which are obtained by subjecting received signals to despread every channel, with each other with respect to the antennas every channel. Each of transmission antenna selecting circuits (305, 405) operates to determine from which antenna the transmission signal is to be transmitted every channel in transmission. Each of multiplexing circuits (106, 206) operates to multiplex the transmission signals of the individual channels, which are obtained by the spread, every antenna. As a result, on the basis of the result of comparing the correlation levels with respect to the first and second antennas (101, 201), the transmission antenna is selected every channel, and the signals to be transmitted of the channels are multiplexed every antenna to transmit the resultant sig-

nal, whereby the base station transmission diversity is realized.

EP 0 668 668 A1

## BACKGROUND OF THE INVENTION

### Field of the Invention

The present invention relates to a mobile telecommunication system which is adapted to secure a communication line for a mobile unit moving in a wide area by utilizing the wireless and more particularly to a mobile telecommunication system which is adapted to perform the communication by utilizing a CDMA/TDD system adopting the direct sequence spread spectrum (DS-SS) system.

### Description of the Related Art

A line access system in which the communication is established among a plurality of stations in the same frequency band is called a multiple access system. A CDMA (Code Division Multiple Access) is the technology in which the multiple access is performed on the basis of the spread spectrum communication in which an information signal is transmitted with the spectrum thereof spread into the sufficiently wider band than the band width of the information signal of the unit. A DS-SS system is a system wherein in the spread, the information signal is directly multiplied by the spreading code. A TDD (Time Division Duplex) means a system wherein the transmission/reception of the signal is performed in the same band and is also called a ping pong system, i.e., it means the system wherein the communication is performed with the same radio frequency subjected to the time division in the transmission/reception. As for the advantages of the TDD system, as shown in a paper of "Micro/Pico Cellular Telecommunication and Network Architecture" (N. Nakajima: the 6-th Karuizawa Workshop on Circuits and Systems (April 19 to 20, 1993) pp.121 to 126), it is well known that since the transmission diversity can be applied to the base station, the space diversity becomes unnecessary in the mobile radio telephone, and as a result, the miniaturization can be realized.

The received radio wave via the mobile propagation path is subjected to the fluctuation called the fading. This becomes the degradation factor of the transmission system. In order to realize the high quality communication, as for the technology for reducing the influence of the above-mentioned fading, the diversity reception utilizing two or more received radio waves is well known. The space diversity is one of the above-mentioned diversity technologies in which by using the sufficiently spaced apart two or more receiving antennas, a plurality of fading received radio waves are obtained which change independently of one another.

On the other hand, the transmission diversity means the technology wherein from the received radio waves received by the space diversity, the conditions of the path from the mobile station to the respective antennas of the base station are estimated, and the transmission is performed in turn from the antenna having the better transmission line state. In the case of the TDD system, since the system of interest is the system wherein the transmission/reception is performed in the same band, the frequency correlation of the fading fluctuation of the transmitted radio wave is the same as that of the received radio wave. Therefore, if the interval of time required for the transmitted radio wave and the received radio wave to be switched to each other is sufficiently short, since the mutual time correlation of the fading fluctuation is high, by the application of the above-mentioned transmission diversity, the reduction of the influence by the fading fluctuation of the transmitted radio wave can be relatively readily promoted. As a result, for the individual channels, the high line quality can be realized.

Heretofore, the application of the transmission diversity in the base station adopting the TDD system has been considered in a TDMA/TDD system employing the TDMA system. The TDMA (Time Division Multiple Access) is the system wherein the radio frequency is subjected to the time division, and the specific time slot is assigned to a user, and in the time slot thus assigned, the communication is performed.

The TDMA/TDD system is employed in a PHS (Personal Handy phone System) as the Japanese next generation digital codeless telephone system as well as in a DECT system which is in development in Europe. Fig. 1 shows an example in which in the PHS, a base station BS is provided with two transmission/reception antennas A and B, and the communication is established between the base station BS and four mobile terminals PS1 to PS4. The PHS has the frame structure as shown in Fig. 2 for example. In this connection, with 5 msec (transmission 2.5 msec/reception 2.5 msec) as one frame, four channels are subjected to the time division multiplexing. Each subframe, in the figure, for accommodating a signal of the associated channel is called a time slot, and each shadowed portion represents guard time which is provided in order to prevent the transmitted signal and the received signal from being collided with each other due to the lag between the transmission timing and the receiving timing.

In addition, Fig. 3 is a view showing an example in which the situation, in which the base station BS having the two antennas A and B as shown in Fig. 1 switches the transmission antenna every channel in accordance with the levels of the re-

ceived signals, is shown by using the transmission/reception frame and the time slot. In Fig. 3, reference symbol TX represents transmission and reference symbol RX represents reception. Then, it is assumed that the four mobile terminals PS1 to PS4 perform the respective communication using the channels 1 to 4. In the case where at time  $t_0$ , the levels of the received signals in the individual channels (the averages or the like of the reception levels between the time slots) have the relationship, as shown in the figure, with respect to the two antennas A and B (the relation of  $A > B$  represents that the reception level of the antenna A is higher than that of the antenna B), when at next time  $t_1$ , the transmission is performed, the antenna having the higher reception level is selected to transmit the signal. In the figure, the reference symbol of the selected antenna is shown. At time  $t_1$ , it is shown that each of the channels 1 and 3 selects the antenna A, and each of the channels 2 and 4 selects the antenna B. In the figure, the time slot for transmission is represented by the shadowed portion. In addition, the portion having no slash represents the time slot in which no transmission is performed. Similarly, at time  $t_3$ , on the basis of the results (received power) at time  $t_2$ , the antenna for transmission is selected every channel. In such a way, the above-mentioned transmission diversity can be realized.

As compared with such a TDMA system, the CDMA system is considered as the system wherein in the cellular system, the higher frequency utilization efficiency than that in the TDMA system can be realized, and hence a larger number of users can be accommodated. Therefore, it is considered that in the future, the CDMA system will be applied to the large number of cellular systems. In addition, the TDD system is the system wherein the transmission/reception is performed in the same frequency band on the basis of the time division, whereas as another communication system, there is well known an FDD (Frequency Division Duplex) system in which the two frequency bands, which are sufficiently apart from each other, are respectively assigned to the transmission and the reception. Heretofore, in the CDMA system, the CDMA/FDD system employing the FDD system has been mainly developed.

However, in the conventional communication apparatus adopting the CDMA/FDD system, there arise the following problems.

- (1) Since the correlation between the fading of the forward link and that of the reverse link is small, the space diversity in the base station can be applied to only the reverse link.
- (2) In the case where the received power is reduced due to the frequency selective fading, the communication quality is degraded and

hence it is difficult to perform the high quality communication.

(3) In the case where the communication capacity is largely increased, since the interference of the communication radio waves of other stations with the communication radio wave of the local station becomes large, the communication quality is degraded, and hence it is difficult to perform the high quality communication.

(4) In the case where the communication capacity is greatly increased, the specification becomes severe which is required for the quadrature modulator and the linear amplifier of the base station.

## SUMMARY OF THE INVENTION

The present invention was made in order to solve the above-mentioned problems associated with the prior art, and it is therefore an object of the present invention to provide a mobile telecommunication system which is capable of applying the space diversity to the forward link as well, and of stabilizing the received power, and of greatly reducing the interference of the communication radio waves of other stations with the communication radio wave of the local station, and of reducing the specification required for the modulator, the amplifier and the like.

In order to attain the above-mentioned object, according to the present invention, in a mobile telecommunication system, a base station includes: a plurality of antennas; means provided in each of the antennas for subjecting a received signal on a reverse link (transmission from a mobile terminal to the base station) to despread every channel; means for comparing correlation levels, which are obtained by the despread, with each other among the antennas every channels; means for selecting an antenna, from which a transmission signal is to be transmitted, every channel in transmission; and means for multiplexing the transmission signals of the individual channels, which are obtained by spread, every antenna.

Therefore, according to the present invention, in the reverse link, the antenna by which the electric field having the good level is received is selected to switch any other antenna thereto to perform the reception, whereby it is possible to maintain always the communication line in the good state. In addition, by increasing the number of antennas, even the request for the high communication quality can be satisfied. Further, since the correlation of the transmission path of the reverse link and that of the forward link is high, in the forward link as well, the same effects can be obtained.

In addition, since the transmission line states are different among the mobile stations, the transmission/reception antenna is selected every line leading to the associated mobile station, whereby the interference due to the communication radio waves of other mobile stations is relatively reduced. As a result, since the communication quality is improved, and also the transmission power can be reduced, the mobile station can be miniaturized and lightened.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic view showing an example of an arrangement of a base station and mobile terminal in a cellular radio communication systems;

Fig. 2 is a schematic view showing frame structure of a PHS;

Fig. 3 is a schematic view showing an example of the base station transmission diversity in the conventional TDMA/TDD system;

Fig. 4 is a block diagram showing a configuration of a main portion of a base station of a mobile telecommunication system according to a first embodiment of the present invention;

Fig. 5 is a schematic view showing an example of the base station transmission diversity of the mobile unit communication system in the first embodiment;

Fig. 6 is a block diagram showing a configuration of a main portion of a base station of a mobile telecommunication system according to a second embodiment of the present invention;

Fig. 7 is a schematic view showing an example of the base station transmission diversity of the mobile telecommunication system in the second embodiment;

Fig. 8 is a schematic view showing an arrangement of antennas of a base station of a mobile telecommunication system according to a third embodiment of the present invention;

Fig. 9 is a schematic view showing an arrangement of antennas of a base station of a mobile telecommunication system according to a fourth embodiment of the present invention;

Fig. 10 is a schematic view showing an arrangement of antennas of a base station of a mobile telecommunication system according to a fifth embodiment of the present invention;

Fig. 11 is a schematic view showing an arrangement of antennas of a base station of a mobile telecommunication system according to a sixth embodiment of the present invention;

Fig. 12 is a flow chart showing an algorithm for controlling a comparison circuit in the sixth embodiment;

Fig. 13 is a schematic view showing an example of the base station transmission diversity of a mobile telecommunication system according to a seventh embodiment of the present invention;

Fig. 14 is a flow chart showing an algorithm for controlling a comparison circuit in the seventh embodiment;

Fig. 15 is a schematic view showing an example of the base station transmission diversity of a mobile telecommunication system according to an eighth embodiment of the present invention; and

Fig. 16 is a flow chart showing an algorithm for controlling a comparison circuit in the eighth embodiment.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

##### (First Embodiment)

Fig. 4 shows a configuration of a base station of a mobile telecommunication system according to a first embodiment of the present invention, i.e., shows an example in which the base station has two antennas and two channels a and b. In Fig. 4, reference numeral 101 designates a first antenna (an antenna A), reference numeral 201 designates a second antenna (an antenna B), reference numeral 102 designates a first transmission/reception switching switch for the first antenna 101, reference numeral 202 designates a second transmission/reception switching switch for the second antenna 201, reference numeral 103 designates a first radio receiving unit for the first antenna 101, and reference numeral 203 designates a second radio receiving unit for the second antenna 201. Reference numeral 105 designates a first despreading circuit for the first antenna 101, and reference numeral 205 designates a second despreading circuit for the second antenna 201. Each of the first and second despreading circuits 105 and 205 operates to subject a received data to the despread using both spreading codes  $\alpha$  and  $\beta$ . Reference numeral 301 designates a first comparison circuit which operates to compare correlation levels (power levels of received signals), which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\alpha$ , with each other with respect to a first channel a, and reference numeral 401 designates a second comparison circuit which operates to compare correlation levels, which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\beta$ , with each other with respect to a second channel b. Reference numeral 302 designates a first composition circuit which operates to compose the

received signals, which have been subjected to the despread in the first and second despread-  
 ing circuits 105 and 205 using the spreading code  $\alpha$ , with  
 respect to the first channel a, and reference num-  
 eral 402 designates a second composition circuit  
 which operates to compose the received signals,  
 which have been subjected to the despread in the  
 first and second despread- ing circuits 105 and 205  
 using the spreading code  $\beta$ , with respect to the  
 second channel b. Reference numeral 303 des-  
 ignates a first decode circuit for the first channel a  
 which operates to decode the composite signal  
 which has been obtained by the composition in the  
 first composition circuit 302, and reference numeral  
 403 designates a second decode circuit for the  
 second channel b which operates to decode the  
 composite signal which has been obtained by the  
 composition in the second composition circuit 402.

Reference numeral 304 designates a first  
 spreading circuit which operates to spread a trans-  
 mission data of the first channel a using the spread  
 code  $\alpha$ , reference numeral 404 designates a sec-  
 ond spreading circuit which operates to spread a  
 transmission data of the second channel b using  
 the spreading code  $\beta$ , reference numeral 305 des-  
 ignates a first transmission antenna selecting circuit  
 for the first channel a which operates to select from  
 which antenna the transmission signal, which has  
 been spread in the first spreading circuit 304, is to  
 be transmitted, and reference numeral 405 des-  
 ignates a second transmission antenna selecting  
 circuit for the second channel b which operates to  
 select from which antenna the transmission signal,  
 which has been spread in the second spreading  
 circuit 404, is to be transmitted. Reference numeral  
 106 designates a first multiplexing circuit which  
 operates to multiplex the spread transmission sig-  
 nals with respect to the first antenna 101, reference  
 numeral 206 designates a second multiplexing cir-  
 cuit which operates to multiplex the spread trans-  
 mission signals with respect to the second antenna  
 201, and reference numeral 104 designates a first  
 radio transmission unit for the first antenna 101  
 which has a first quadrature modulator 107 and a  
 first linear amplifier 108. Reference numeral 204  
 designates a second radio transmission unit for the  
 second antenna 201 which has a second quadra-  
 ture modulator 207 and a second linear amplifier  
 208. In addition, reference numeral 501 designates  
 a transmission/reception switching timing signal  
 which is used to operate the first and second  
 transmission/reception switching switches 102 and  
 202.

Next, the description will hereinbelow be given  
 with respect to the operation of the above-men-  
 tioned first embodiment.

The received signals which have been received  
 by the first and second antennas 101 and 201,

respectively, are subjected to the first order de-  
 modulation in the first and second radio receiving  
 units 103 and 203 through the first and second  
 transmission/reception switching switches 102 and  
 202, respectively. Then, after the down-conversion  
 and the detection, the correlation of the first chan-  
 nel a and that of the second channel b are de-  
 tected by each of the first and second despread-  
 ing circuits 105 and 205. With respect to the correla-  
 tion detection results which have been obtained  
 from the two antennas 101 and 201 independently  
 of each other, the frame mean powers of the cor-  
 relation levels (the power levels of the received  
 signals) are calculated every channel in each of the  
 first and second comparison circuits 301 and 401.  
 On the basis of those results, the transmission line  
 states (the transfer functions of the transmission  
 lines) of the first and second antennas 101 and 201  
 are obtained, and then it is determined from which  
 of the first and second antennas 101 and 201 the  
 signal of each channel is to be transmitted at the  
 next transmission timing, and then, first and second  
 transmission antenna selection signals 306 and 406  
 are respectively output. The received signals which  
 have been passed through the first and second  
 comparison circuits 301 and 401, respectively, are  
 composed by the first and second composition  
 circuits 302 and 402 to be decoded in the first and  
 second decode circuits 303 and 403, thereby ob-  
 taining the reception data of the individual chan-  
 nels.

On the other hand, the transmission data of the  
 first channel a and the transmission data of the  
 second channel b (the signals after the digital mod-  
 ulation) are respectively subjected to the band  
 spread in the first and second spreading circuits  
 304 and 404 using the spreading codes  $\alpha$  and  $\beta$ ,  
 which are assigned to the respective channels, and  
 then are multiplexed every transmission antenna in  
 the first and second multiplexing circuits 106 and  
 206 through the first and second transmission an-  
 tenna selecting circuits 305 and 405 which have  
 been switched by the first and second transmission  
 antenna selection signals 306 and 406. The mul-  
 tiplexed signals are respectively up-converted in  
 the first and second radio transmission units 104  
 and 204, and then are respectively transmitted  
 outwardly from the first and second antennas 101  
 and 201 through the first and second transmis-  
 sion/reception switching switches 102 and 202  
 which are switched by the transmission/reception  
 switching timing signal 501.

Fig. 5 shows an example in which the situation,  
 in which in the CDMA/TDD system of the present  
 embodiment, the base station including the two  
 antennas A and B switches the transmission an-  
 tenna every channel in accordance with the levels  
 of the received signals, is shown by using the

transmission/reception frame. In addition, Fig. 5 shows the example in the case where four channels are provided. Similarly to the TDMA/TDD system shown in Fig. 3, reference symbol TX represents transmission, and reference symbol RX represents reception, and it is assumed that the mobile terminals PS1 to PS4 (referring to Fig. 1) perform the respective communication using channels 1 to 4. In the case where at time  $t_0$ , the levels of the received signals of the individual channels (the averages or the like of the levels of the received signals for one frame) have the relationship, as shown in the figure, with respect to the antennas A and B, it is assumed that when the transmission is performed at next time  $t_1$ , the antenna having the higher reception level is selected to perform the transmission. In the figure, reference symbol of the selected antenna is shown. Then, it is shown that at time  $t_1$ , each of the channels 1 and 3 selects the antenna A and each of the antennas 2 and 4 selects the antenna B, and after the signal of the channel 1 and the signal of the channel 3 have been multiplexed, the resultant signal is transmitted outwardly from the antenna A, and also after the signal of the channel 2 and the signal of the channel 4 have been multiplexed, the resultant signal is transmitted outwardly from the antenna B. At time  $t_3$  and time  $t_5$  as well, on the basis of the reception levels at time  $t_2$  and time  $t_4$ , the antenna is selected every channel to perform the multiplexing every antenna to transmit the resultant signals.

As a result, there is provided the effect that under the environment of the fading which changes depending on the frequency band and varies in terms of time, the power levels of the received signals of the reverse link and the forward link can be stabilized, and the high quality communication can be realized.

(Second Embodiment)

Fig. 6 shows a configuration of a base station of a mobile telecommunication system according to a second embodiment of the present invention, and also shows an example in which the base station has two antennas and two channels a and b. In Fig. 6, reference numeral 101 designates a first antenna (an antenna A), reference numeral 201 designates a second antenna (an antenna B), reference numeral 102 designates a first transmission/reception switching switch for the first antenna 101, reference numeral 202 designates a second transmission/reception switching switch for the second antenna 201, reference numeral 103 designates a first radio receiving unit for the first antenna 101, and reference numeral 203 designates a second radio receiving unit for the second antenna 201. Reference numeral 105 designates a first despreading

circuit for the first antenna 101, and reference numeral 205 designates a second despreading circuit for the second antenna 201. In this connection, each of the first and second despreading circuits 105 and 205 operates to subject a received data to the despread using spreading codes  $\alpha$  and  $\beta$ . Reference numeral 307 designates a first estimation circuit which operates to estimate future values from past values of the correlation levels (the power levels of received signals), of the first channel a, which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\alpha$ , and reference numeral 407 designates a second estimation circuit which operates to estimate future values from past values of the correlation levels, of the second channel b, which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\beta$ . Reference numeral 301 designates a first comparison circuit for the first channel a which operates to compare the estimated values of the correlation levels, which have been obtained from the first estimation circuit 307, between the first and second antennas 101 and 201, reference numeral 401 designates a second comparison circuit for the second channel b which operates to compare the estimated values of the correlation levels, which have been obtained from the second estimation circuit 407, between the first and second antenna 101 and 201, reference numeral 302 designates a first composition circuit which operates to compose the received signals of the first channel a which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\alpha$ , reference numeral 402 designates a second composition circuit which operates to compose the received signals of the second channel b which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\beta$ , reference numeral 303 designates a first decode circuit for the first channel a which operates to decode the composite signal which has been obtained by composing the received signals in the first composition circuit 302, and reference numeral 403 designates a second decode circuit for the channel b which operates to decode the composite signal which has been obtained by composing the received signals in the second composition circuit 402.

Reference numeral 304 designates a first spreading circuit which operates to spread a transmission data of the first channel a using the spreading code  $\alpha$ , reference numeral 404 designates a second spreading circuit which operates to spread a transmission data of the second channel b using the spreading code  $\beta$ , reference numeral 305 designates a first transmission antenna select-

ing circuit for the first channel a which operates to determine from which antenna the transmission signal, which has been obtained by the spread in the first spreading circuit 304, is to be transmitted, and reference numeral 405 designates a second transmission antenna selecting circuit for the second channel b which operates to determine from which antenna the transmission signal, which has been obtained by the spread in the second spreading circuit 404, is to be transmitted. Reference numeral 106 designates a first multiplexing circuit which operates to multiplex the spread transmission signals with respect to the first antenna 101, reference numeral 206 designates a second multiplexing circuit which operates to multiplex the spread transmission signals with respect to the second antenna 201, and reference numeral 104 designates a first radio transmission unit for the first antenna 101 which has a first quadrature modulator 107 and a first linear amplifier 108. Reference numeral 204 designates a second radio transmission unit for the second antenna 201 which has a second quadrature modulator 207 and a second linear amplifier 208. In addition, reference numeral 501 designates a transmission/reception switching timing signal which is used to operate the first and second transmission/reception switching switches 102 and 203.

Next, the description will hereinbelow be given with respect to the operation of the above-mentioned second embodiment.

The received signals which have been received by the first and second antennas 101 and 201, respectively, are subjected to the first order demodulation in the first and second radio receiving units 103 and 203 through the first and second transmission/reception switching switches 102 and 202. Then, after the down-conversion and the detection, the correlations of the first and second channels a and b are detected by each of the first and second despreading circuits 105 and 205. With respect to the correlation detection results which have been obtained from the two antennas 101 and 201 independently of each other, the frame mean powers of the correlation levels (the power levels of the received signals) are calculated every channel in the first and second estimation circuits 307 and 407. On the basis of those results, the transmission line states (the transfer functions of the transmission lines) of the first and second antennas 101 and 201 are obtained to estimate the future values from the past values, and the estimated future values are compared with each other by each of the first and second comparison circuits 301 and 401, and then it is determined from which of the first and second antennas 101 and 201 the signal of each channel is to be transmitted outwardly at the next transmission timing, and then first and

second transmission antenna selection signals 306 and 406 are respectively output. The received signals which have been passed through the first and second comparison circuits 301 and 401, respectively, are composed in the first and second composition circuits 302 and 402 to be decoded in the first and second decode circuits 303 and 403 of the respective channels, thereby obtaining the reception data of the individual channels.

On the other hand, the transmission data of the first channel a and the transmission data of the second channel b (the signals after the digital modulation) are respectively subjected to the band spread in the first and second spreading circuits 304 and 404 using the spreading codes  $\alpha$  and  $\beta$ , which are assigned to the respective channels, and then are multiplexed every transmission antenna in the first and second multiplexing circuits 106 and 206 through the first and second transmission antenna selecting circuits 305 and 405 which are switched to each other by the first and second transmission antenna selection signals 306 and 406. The multiplexed signals are respectively up-converted in the first and second radio transmission units 104 and 204, and then are respectively transmitted outwardly from the first and second antennas 101 and 201 through the first and second transmission/reception switching switches 102 and 202 which are switched to each other by the transmission/reception switching timing signal 501.

Fig. 7 shows an example in which the situation, in which in the CDMA/TDD system of the present embodiment, the base station including the two antennas A and B switches the transmission antenna every channel in accordance with the levels of the received signals, is shown by using the transmission/reception frame. In addition, Fig. 7 shows the example in the case where four channels are provided. Similarly to Fig. 5, reference symbol TX represents transmission, and reference symbol RX represents reception, and it is assumed that the mobile terminals PS1 to PS4 (referring to Fig. 1) perform the respective communication using the channels 1 to 4. In the case where at time  $t_0$ , the levels of the received signals of the individual channels (the averages or the like of the levels of the received signals for one frame) have the relationship, as shown in Fig. 7, with respect to the antennas A and B, and are estimated, at time  $t_1$ , as shown in Fig. 7, it is assumed that when at next time  $t_1$ , the transmission is performed, the antenna having the higher estimated value of the reception level is selected to perform the transmission. In the figure, reference symbol of the selected antenna is shown. Then, it is shown that at time  $t_1$ , each of the channels 1 and 3 selects the antenna A and each of the channels 2 and 4 selects the antenna B, and after the signal of the channel 1 and the

signal of the channel 3 have been multiplexed, the resultant signal is transmitted outwardly from the antenna A, and also after the signal of the channel 2 and the signal of the channel 4 have been multiplexed, the resultant signal is transmitted outwardly from the antennas B. At time t3 as well, on the basis of the reception levels at time t2 and those at time prior thereto, the transmission line states at time t3 are estimated, and the transmission antenna is selected every channel to perform the multiplexing every antenna, and then the multiplexed signals are transmitted outwardly from the associated antennas. At time t5 as well, similarly, the above-mentioned processings will be executed.

As a result, there is provided the effect that under the environment of the fading which changes depending on the frequency band and varies in terms of time, the states of the transmission lines can be estimated, and the power levels of the received signals of the reverse link and the forward link can be stabilized, and the high quality communication can be realized.

#### (Third Embodiment)

A configuration of a base station of a mobile telecommunication system according to the present embodiment is the same as that in the second embodiment. Fig. 8 shows an example of an antenna arrangement of the base station of the mobile telecommunication system in the present embodiment, and also shows an example in the case where three antennas A, B and C are provided. With respect to the antennas A, B and C, any two antennas are enough separated to obtain the independent fading transmission lines and is concentrically arranged in the central portion of the cover area of the base station.

In the mobile telecommunication, the fluctuations in the power level of the received signal are roughly due to the following three factors.

- (1) Change caused by distance: Fluctuations in the reception level due to the change in the communication distance caused by the movement of the mobile station.
- (2) Change in central value: Fluctuations in the reception level due to the change in the environment such as buildings.
- (3) Instantaneous change: Fluctuations in the reception level due to the frequency selective fading.

In the case where the three antennas are arranged in a manner as shown in Fig. 8, distances La, Lb and Lc between the mobile station and the three antennas A, B and C are not largely different from one another. In addition, since there is not a large difference even in the environment such as the communication lines, and hence the instantane-

ous change becomes the predominant factor in the fluctuations in the reception level, for the long term average, there is no difference in the reception levels among the antennas. Therefore, even if the reception level of the antenna A is instantaneously dropped, the possibility is high that the higher reception level is obtained in the antenna B or C, and thus in the antenna of interest, the good reception may be obtained. This is also applied to the case where the reception level of the antenna B or C is dropped. Thus, the possibility is small that the reception levels of all of the three antennas are dropped. Therefore, if the antenna having the higher reception level is selected to perform the transmission/reception, the communication at the high reception level can be always performed. In addition, by increasing the number of antennas, the possibility is more and more reduced that the reception levels of all of the antennas are dropped, and thus the fluctuation in the reception level after selection of the antenna becomes small.

The effect that the communication quality is improved by stabilizing the transmission/reception level is remarkable on the reception side (in the reverse link in the base station). That is, there is provided the effect that the high quality communication in which the bit error rate is low in the reverse link becomes possible.

#### (Fourth Embodiment)

A configuration of a base station of a mobile telecommunication system according to the present embodiment is the same as that in the second embodiment. Fig. 9 shows an example of an antenna arrangement of the base station of the mobile telecommunication system in the present embodiment, and also shows an example in which three antennas A, B and C are arranged. The three antennas A, B and C are distributively arranged in a plurality of locations within the cover area of the base station. With respect to the three antennas A, B and C, any two antennas are enough separated to obtain the independent fading transmission lines.

In the case where the three antennas A, B and C are arranged in a manner as shown in Fig. 9, since the distances La, Lb and Lc between the mobile station and the three antennas A, B and C are greatly different from one another, the change caused by distance becomes the predominant factor in the fluctuations in the reception level. As a result, in accordance with the position of the mobile station, the antennas by which the signals of the channels are to be transmitted/received are substantially determined. In this case, since the communication radio waves of other stations, which are transmitted/received by the associated antennas, are greatly attenuated as the distances further in-



crease, as compared with the communication radio wave of the local station, it is difficult for those communication radio waves of other stations to interfere with the communication radio wave of the local station. That is, the communication radio waves of other stations which are transmitted/received by the same antenna is the predominant factor in the interference. In such a way, if a plurality of antennas are widely distributively arranged within the cover area of the base station, from the randomness of the positions of the mobile stations, the number of mobile stations for which the transmission/reception by the individual antennas is predominant becomes equal to one another in terms of probabilities. That is, as compared with the case where the number of antennas is one, in the case where the number of antennas is three, the number of mobile stations for which the transmission/reception by the same antenna is predominant is reduced to 1/3, and the number of communication radio waves of other stations other than the local station, which cause the interference, is approximately reduced to 1/3. Thus, the interference is greatly reduced.

The effect that the communication quality is improved by reducing the interference is remarkable on the transmission side (in the forward link in the base station). That is, there is provided the effect that the high quality communication in which the bit error rate is low in the forward link becomes possible.

#### (Fifth Embodiment)

A configuration of a base station of a mobile telecommunication system according to the present embodiment is the same as that in the second embodiment. Fig. 10 shows an example of an antenna arrangement of the base station of the mobile telecommunication system in the present embodiment, and also shows an example in the case where ten antennas are arranged. The ten antennas are divided into four antenna groups a, b, c and d. The antenna group a has the three antennas, the antenna group b has the three antennas, the antenna group c has the two antennas, and the antenna group d has the two antennas. Those antenna groups are arranged in the four locations within the cover area of the base station. The antennas in each antenna group are concentrically arranged in the associated location so as to be enough separated to obtain the independent fading transmission lines. The distances among the antenna groups are sufficiently larger than those among the antennas in each antenna group.

In the case where those antennas are arranged in a manner as shown in Fig. 10, since the distances  $L_a$ ,  $L_b$ ,  $L_c$  and  $L_d$  between the mobile

station and the antenna groups a, b, c and d are largely different from one another, the change caused by distance becomes the predominant factor in the difference in the reception levels among the antenna groups. Therefore, in accordance with the position of the mobile station, the antenna group by which the transmission/reception is to be performed is substantially determined. In this case, since the communication radio waves of other stations which are transmitted/received by the antennas of other antenna groups are largely attenuated as the distances further increase, as compared with the communication radio wave of the local station, it is difficult for those communication radio waves of other stations to interfere with the communication radio wave of the local station. That is, the cause of the interference is substantially limited to the communication radio waves of other stations which are transmitted/received by the same antenna group. In such a way, if the antenna groups are widely distributively arranged in the cover area of the base station, from the randomness of the positions of the mobile stations, the number of mobile stations for which the transmission/reception by the individual antenna groups is predominant become equal to one another in terms of probabilities. That is, as compared with the case where the number of antenna groups is one, in the case where the number of antenna groups is three, the number of mobile stations for which the transmission/reception by the same antenna group is predominant is reduced to 1/3, and the number of communication radio waves of other stations other than the local station, which cause the interference, is approximately reduced to 1/3. Thus, the interference is greatly reduced.

On the other hand, the distances between the mobile station and the individual antennas in the same antenna group are not largely different from one another. Since there is not the large difference in the environment such as the communication lines, and the instantaneous change becomes the predominant factor in the fluctuations in the reception level, for the long term average, there is no difference in reception level between the antennas. Therefore, even if in the communication with the mobile station for which the transmission/reception by the antenna group d for example becomes predominant, the reception level of the antenna A is instantaneously dropped, the possibility is high that the higher reception level is obtained in the antenna B or C, and hence in the antenna of interest, the good reception is obtained. This is also applied to the case where the reception level of the antenna B or C is dropped. Thus, the possibility is small that the reception levels of all of the three antennas are dropped. Therefore, if the antenna having the higher reception level is selected

to perform the transmission/reception, the communication at the high reception level can be always performed. In addition, by increasing the number of antennas, the possibility is more and more reduced that the reception levels of all of the antennas are dropped, and hence the fluctuation in the reception level after selection of the antenna becomes small.

The effect that the communication quality is improved by stabilizing the transmission/reception level is remarkable on the reception side (in the reverse link in the base station). On the other hand, the effect that the communication quality is improved by reducing the interference is remarkable on the transmission side (in the forward link in the base station). That is, there is provided the effect that the high quality communication in which the bit error rate is low in both of the reverse link and the forward link becomes possible.

#### (Sixth Embodiment)

Fig. 11 shows a configuration of a base station of a mobile telecommunication system according to a sixth embodiment of the present invention, and also shows an example in which the base station includes two antennas and two channels a and b. In Fig. 11, reference numeral 101 designates a first antenna (an antenna A), reference numeral 201 designates a second antenna (an antenna B), reference numeral 102 designates a first transmission/reception switching switch for the first antenna 101, reference numeral 202 designates a second transmission/reception switching switch for the second antenna 201, reference numeral 103 designates a first radio receiving unit for the first antenna 101, and reference numeral 203 designates a second radio receiving unit for the second antenna 201. Reference numeral 105 designates a first despreading circuit for the first antenna 101, and reference numeral 205 designates a second despreading circuit for the second antenna 201. In this connection, each of the first and second despreading circuits 105 and 205 operates to subject a received data to the despread using spreading codes  $\alpha$  and  $\beta$ . Reference numeral 307 designates a first estimation circuit which operates to estimate future values from past values of the correlation levels (the power levels of received signals), of the first channel a, which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\alpha$ , and reference numeral 407 designates a second estimation circuit which operates to estimate future values from past values of the correlation levels, of the second channel b, which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\beta$ . Reference numeral 301 designates a first com-

parison circuit for the first channel a which operates to compare the estimated values of the correlation levels, which have been obtained from the first estimation circuit 307, between the first and second antennas 101 and 201, and reference numeral 401 designates a second comparison circuit for the second channel b which operates to compare the estimated values of the correlation levels, which have been obtained from the second estimation circuit 407, between the first and second antennas 101 and 201. Reference numeral 302 designates a first composition circuit which operates to compose the received signals of the first channel a which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\alpha$ , reference numeral 402 designates a second composition circuit which operates to compose the received signals of the second channel b which have been obtained by the despread in the first and second despreading circuits 105 and 205 using the spreading code  $\beta$ , reference numeral 303 designates a first decode circuit for the first channel a which operates to decode the composite signal which has been obtained by composing the received signals in the first composition circuit 302, and reference numeral 403 designates a second decode circuit for the channel b which operates to decode the composite signal which has been obtained by composing the received signals in the second composition circuit 402. In addition, reference numeral 502 designates a comparison circuits controlling circuit which operates to be responsive to first and second transmission antenna selection signals 306 and 406, which have been output from the first and second comparison circuits 301 and 401, respectively, to control the operations of the first and second comparison circuits 301 and 401.

Reference numeral 304 designates a first spreading circuit which operates to spread a transmission data of the first channel a using the spreading code  $\alpha$ , reference numeral 404 designates a second spreading circuit which operates to spread a transmission data of the second channel b using the spreading code  $\beta$ , reference numeral 305 designates a first transmission antenna selecting circuit for the first channel a which operates to determine from which antenna the transmission signal, which has been obtained by the spread in the first spreading circuit 304, is to be transmitted, and reference numeral 405 designates a second transmission antenna selecting circuit for the second channel b which operates to determine from which antenna the transmission signal, which has been obtained by the spread in the second spreading circuit 404, is to be transmitted. Reference numeral 106 designates a first multiplexing circuit which operates to multiplex the spread transmis-

sion signals with respect to the first antenna 101, reference numeral 206 designates a second multiplexing circuit which operates to multiplex the spread transmission signals with respect to the second antenna 201, and reference numeral 104 designates a first radio transmission unit for the first antenna 101 which has a first quadrature modulator 107 and a first linear amplifier 108. Reference numeral 204 designates a second radio transmission unit for the second antenna 201 which has a second quadrature modulator 207 and a second linear amplifier 208. In addition, reference numeral 501 designates a transmission/reception switching timing signal which is used to operate the first and second transmission/reception switching switches 102 and 202.

Next, the description will hereinbelow be given with respect to the operation of the above-mentioned sixth embodiment.

The received signals which have been received by the first and second antennas 101 and 201, respectively, are subjected to the first order demodulation in the first and second radio receiving units 103 and 203 through the first and second transmission/reception switching switches 102 and 202. Then, after the down-conversion and the detection, the correlations of the first and second channels a and b are detected by each of the first and second despreading circuits 105 and 205. With respect to the correlation detection results which have been obtained from the two antennas 101 and 201 independently of each other, the frame mean powers of the correlation levels (the power levels of the received signals) are calculated every channel in the first and second estimation circuits 307 and 407. On the basis of those results, the transmission line states (the transfer functions of the transmission lines) of the first and second antennas 101 and 201 are obtained to estimate the future values from the past values, and the estimated future values are compared with each other by each of the first and second comparison circuits 301 and 401, and then it is determined, by the instruction issued from the comparison circuits controlling circuit 502, from which of the first and second antennas 101 and 201 the signal of each channel is to be transmitted outwardly at the next transmission timing, and then first and second transmission antenna selection signals 306 and 406 are respectively output. The first and second transmission antenna selection signals 306 and 406 are feedback to the comparison circuits controlling circuit 502 which is responsive to the first and second transmission antenna selection signals 306 and 406 to determine whether or not the transmission antenna is selected over again to issue the instruction to both of the first and second comparison circuits 301 and 401. The received signals which have

been passed through the first and second comparison circuits 301 and 401, respectively, are composed in the first and second composition circuits 302 and 402 to be decoded in the first and second decode circuits 303 and 403 of the respective channels, thereby obtaining the reception data of the individual channels.

On the other hand, the transmission data of the first channel a and the transmission data of the second channel b (the signals after the digital modulation) are respectively subjected to the band spread in the first and second spreading circuits 304 and 404 using the spreading codes  $\alpha$  and  $\beta$ , which are assigned to the respective channels, and then are multiplexed every transmission antenna in the first and second multiplexing circuits 106 and 206 through the first and second transmission antenna selecting circuits 305 and 405 which are switched to each other by the first and second transmission antenna selection signals 306 and 406. The multiplexed signals are respectively up-converted in the first and second radio transmission units 104 and 204, and then are respectively transmitted outwardly from the first and second antennas 101 and 201 through the first and second transmission/reception switching switches 102 and 202 which are switched to each other by the transmission/reception switching timing signal 501.

The operation for switching the antenna in the CDMA/TDD system of the present embodiment is the same as that shown in Fig. 7. In the case where at time  $t_0$ , the levels of the received signals of the individual channels (the averages or the like of the levels of the received signals for one frame) have the relationship, as shown in Fig. 7, with respect to the antennas A and B, and are estimated, at next time  $t_1$ , as shown in Fig. 7, when at next time  $t_1$ , the transmission is performed, the individual channels select the antennas each having the higher reception level independently of one another to transmit therefrom outwardly the associated signals. This algorithm is shown in Fig. 12.

In Fig. 12, firstly, the antenna from which the signal of the channel 1 is to be transmitted outwardly is selected (Step 901), and next the antenna from which the signal of the channel 2 is to be transmitted outwardly is selected (Step 902), and next the antenna from which the signal of the channel 3 is to be transmitted outwardly is selected (Step 903), and finally, the antenna from which the signal of the channel 4 is to be transmitted outwardly is selected (Step 904). Those antennas are selected perfectly independently of one another, and from which antennas the signals of other channels are to be transmitted outwardly does not exert no influence on the selection of the transmission antenna of each channel. In Fig. 7, reference symbol of the selected antenna is shown. In this con-

section, it is shown at time  $t_1$  that each of the channels 1 and 3 selects the antenna A and each of the channels 2 and 4 selects the antenna B, and then after the signals of the channel 1 and the signal of the channel 3 have been multiplexed, the resultant signal is transmitted outwardly from the antenna A, and also after the signal of the channel 2 and the signal of the channel 4 have been multiplexed, the resultant signal is transmitted outwardly from the antenna B. At time  $t_3$  as well, on the basis of the reception levels at time  $t_2$  and those at time prior thereto, the transmission line states at time  $t_3$  are estimated, and the transmission antenna is selected every channel and the multiplexing is performed every antenna, and then the resultant signals are transmitted outwardly from the associated antennas. At time  $t_5$  as well, similarly, the above-mentioned processings will be executed.

From the randomness of the positions of the mobile stations and the independency of the fading of the transmission lines between the antennas, even by such a simple transmission antennas selecting algorithm, the selected transmission antennas for the individual channels are not concentrated, in terms of probabilities, on a part of the antennas, but are distributed to the individual antennas. That is, there is provided the effect that without the complicated control, the transmission antennas are distributed to the individual antennas to reduce the number of channels the signals of which are multiplexed in one antenna, and as a result the performance can be reduced which is required for the first and second quadrature modulators 107 and 207, and the first and second linear amplifiers 108 and 208 of the first and second radio transmission units 104 and 204.

#### (Seventh Embodiment)

A configuration of a base station of a mobile telecommunication system according to the present embodiment is the same as that in the sixth embodiment. Fig. 13 shows an example in which the situation, in which in the CDMA/TDD system of the present embodiment, the base station having two antennas A and B switches the transmission antenna every channel in accordance with the levels of the received signals, is shown by using the transmission/reception frame, and also shows an example in the case where four channels are provided. In this connection, similarly to Fig. 5, reference symbol TX represents transmission and reference symbol RX represents reception, and it is assumed that the mobile terminals PS1 to PS4 (referring to Fig. 1) perform the respective communication using the channels 1 to 4. In the case where at time  $t_0$ , the levels of the received signals

of the channels (the averages or the like of the levels of the received signals for one frame) have the relationship, as shown in Fig. 13, with respect to the antennas A and B, and then are estimated, at next time  $t_1$ , as shown in Fig. 13, when at next time  $t_1$ , the transmission is performed, the individual channels select the respective antennas each having the higher estimated value of the reception level independently of one another to transmit therefrom outwardly the associated signals. This algorithm is shown in Fig. 14.

In Fig. 14, firstly, the relation of  $X=100$  is set. Then, out of the antenna having the highest reception level and the antenna having the second highest reception level, the antenna having the highest reception level is selected at a probability of  $X\%$ , and the antenna having the second highest reception level is selected at a probability of  $(100-X)\%$  (Step 1101). First, the antenna from which the signal of the channel 1 is to be transmitted outwardly is selected (Step 1102), and next the antenna from which the signal of the channel 2 is to be transmitted outwardly is selected (Step 1103), and next the antenna from which the signal of the channel 3 is to be transmitted outwardly is selected (Step 1104), and finally, the antenna from which the signal of the channel 4 is to be transmitted outwardly is selected (Step 1105). Then, it is checked whether or not the antennas from which the signals of the individual channels are to be transmitted outwardly are concentrated on a part of the antennas (e.g., one antenna) (Step 1106). Then, if not, the processing of selecting the transmission antennas is completed. On the other hand, if so, the value of  $X$  is gradually decreased (Step 1107) and the transmission antennas for the individual channels are selected over again in accordance with the above-mentioned algorithm. In Fig. 13, reference symbol of the selected antenna is shown. In addition, it is shown at time  $t_1$  that each of the channels 1 and 3 selects the antenna A and each of the channels 2 and 4 selects the antenna B, and that after the signal of the channel 1 and the signal of the channel 3 have been multiplexed, the resultant signal is transmitted outwardly from the antenna A, and also after the signal of the channel 2 and the signal of the channel 4 have been multiplexed, the resultant signal is transmitted outwardly from the antenna B. Then, it is shown at time  $t_3$  that each of the channels 1, 2 and 3 selects the antenna A and only the channel 4 selects the antenna B, and that after the signal of the channel 1, the signal of the channel 2 and the signal of the channel 3 have been multiplexed, the resultant signal is transmitted outwardly from the antenna A, and also the signal of the channel 4 is transmitted outwardly from the antenna B (after the multiplexing). Then, at time  $t_5$ , since for each of all of the channels, the antenna A

has the larger estimated value than that of the antenna B, in the first selection at a probability of  $X = 100$ , all of the channels select the antenna A, and hence the transmission antennas therefor concentrate on one antenna. As a result of decreasing slightly the value of  $X$  to perform the selection over again, it is shown that the channel 4 selects the antenna B.

From the randomness of the positions of the mobile stations and the independency of the fading of the transmission lines between the antennas, even in the selection at a probability of  $X = 100\%$ , though small in terms of probabilities, the selected transmission antennas for the associated channels may concentrate on one of the antennas in some cases. In such cases, there is provided the effect that even if the channel(s) selecting the antenna(s), in which the reception level is not maximum, may be more or less present, by selecting the antennas over again, the transmission antennas are distributed to the individual antennas so that the number of channels the signals of which are multiplexed can be reduced, and also the performance can be reduced which is required for the first and second quadrature modulators 107 and 207 and the first and second linear amplifiers 108 and 208 of the first and second radio transmission units 104 and 204 in the base station.

#### (Eighth Embodiment)

A configuration of a base station of a mobile telecommunication system according to the present embodiment is the same as that in the sixth embodiment. But, an example is considered in which the total number of accommodation channels within the cover area of the base station is four ( $L = 4$ ). As for the performance of the first and second quadrature modulators 107 and 207 and the first and second linear amplifiers 108 and 208 of the first and second radio transmission units 104 and 204, the radio transmission unit for one antenna has the transmission capability up to two channels ( $M = 2$ ). Fig. 15 is an example in which in the CDMA/TDD system, the situation, in which the base station having the two antennas A and B switches the transmission antenna every channel in accordance with the levels of the received signals, is shown by using the transmission/reception frame, and also shows an example in which the four channels are provided. In this connection, similarly to Fig. 5, reference symbol TX represents transmission and reference symbol RX represents reception, and also it is assumed that the mobile terminals PS1 to PS4 (referring to Fig. 1) perform the respective communication using the channels 1 to 4. In the case where at time  $t_0$ , the levels of the received signals of the channels (the averages or

the like of the levels of the received signals for one frame) have the relationship, as shown in Fig. 15, with respect to the antennas A and B, and then are estimated, at next time  $t_1$ , as shown in Fig. 15, when at next time  $t_1$ , the transmission is performed, the individual channels select the respective antennas each having the higher estimated value of the reception level independently of one another to transmit therefrom outwardly the associated signals. This algorithm is shown in Fig. 16.

In Fig. 16, firstly, the relation of  $X = 100$  is set. Then, out of the antenna having the highest reception level and the antenna having the second highest reception level, the antenna having the highest reception level is selected at a probability of  $X\%$ , and the antenna having the second highest reception level is selected at a probability of  $(100 - X)\%$  (Step 1301). First, the antenna from which the signal of the channel 1 is to be transmitted outwardly is selected (Step 1302), and next the antenna from which the signal of the channel 2 is to be transmitted outwardly is selected (Step 1303), and next the antenna from which the signal of the channel 3 is to be transmitted outwardly is selected (Step 1304), and finally, the antenna from which the signal of the channel 4 is to be transmitted outwardly is selected (Step 1305). Then, it is checked whether or not the antenna which has been selected as the transmission antenna by three or more channels is present (Step 1306). If not, the processing of selecting the transmission antennas is completed. On the other hand, if so, the value of  $X$  is gradually decreased (Step 1307), and then the transmission antennas for the individual channels are selected over again until such an antenna becomes absent. In Fig. 15, reference symbol of the selected antenna is shown. In addition, it is shown at time  $t_1$  that each of the channels 1 and 3 selects the antenna A and each of the channels 2 and 4 selects the antenna B, and that after the signal of the channel 1 and the signal of the channel 3 have been multiplexed, the resultant signal is transmitted outwardly from the antenna A, and also after the signal of the channel 2 and the signal of the channel 4 have been multiplexed, the resultant signal is transmitted outwardly from the antenna B. Since at time  $t_3$ , for the channels 1, 2 and 3, the antenna A has the larger estimated value than that of the antenna B, and for the channel 4, the antenna B has the larger estimated value than that of the antenna A, in the first selection at a probability of  $X = 100$ , each of the channels 1, 2 and 3 selects the antenna A, and also the channel 4 selects the antenna B. Thus, the three channels concentrate on the antenna A. As a result of decreasing slightly the value of  $X$  to perform the selection over again, it is shown that the channel 2 selects the antenna B. Then, at time  $t_5$ , since for each of all of the

channels, the antenna A has the larger estimated value than that of the antenna B, in the first selection at a probability of  $X=100$ , all of the channels select the antenna A, and hence the transmission antennas therefor concentrate on one antenna. As a result of decreasing slightly the value of  $X$  to perform the selection over again, it is shown that the channels 3 and 4 select the antenna B.

From the randomness of the positions of the mobile stations and the independency of the fading of the transmission lines between antennas, even in the first selection at a probability of  $X=100$ , the selected transmission antennas for the associated channels are not concentrated, in terms of probabilities, on one of the antennas, but are distributed to the individual antennas. But, though small in terms of probabilities, the selected transmission antennas for the associated channels may be concentrated on one of the antennas in some cases. In such cases, even if the channels may be more or less present which select the antenna(s) in which the reception level is not maximum, when the antennas are selected over again so that the transmission antennas are distributed to the individual antennas, the system can suppress more effectively the interference. In addition, there is provided the effect that even in the case where the performance of the first or second quadrature modulator 107 or 207 and the first or second linear amplifier 108 or 208 of the first or second radio transmission unit 108 or 208 for one antenna in the base station is inferior to the mobile station accommodation capability of the whole base station, by distributing the transmission antennas to the individual antennas to decrease the number of channels the signals of which are multiplexed, the system can be readily configured.

## Claims

1. A mobile telecommunication system for performing communication by utilizing a CDMA/TDD system, characterized by a base station comprising:

a plurality of antennas (101, 201);

despreading means (105, 205) for subjecting signals, which are received by said antennas, to despread every channel;

comparison circuits (301, 401) each of which serve to compare correlation levels, which are obtained by said despreading means, with each other with respect to said antennas every channel and to determine from which antenna a signal is to be transmitted outwardly;

spreading means (304, 404) for spreading a transmission data every channel in transmission;

transmission antenna selecting means (305, 405) for selecting, on the basis of an output signal from each of said comparison circuits, every channel, an antenna from which a transmission signal, which is obtained by the spread in said spreading means, is to be transmitted outwardly; and

multiplexing means (106, 206) for multiplexing the transmission signals of the associated channels, which are obtained by the spread, every antenna.

2. A system according to Claim 1, characterized in that said base station further comprises means (302, 402) for composing the correlation levels of said antennas, which are obtained by the despread, every channel.
3. A system according to Claim 1 or 2, characterized in that said base station further comprises means (307, 407) for estimating, from changes in past values of the correlation levels of said antennas which are obtained by the despread, future values of the correlation levels every channel.
4. A system according to one of Claims 1 to 3, characterized in that all of said plurality of antennas of said base station are concentrically arranged in a central portion of a cover area of said base station.
5. A system according to one of Claims 1 to 3, characterized in that said plurality of antennas of said base station are distributively arranged in a plurality of locations within a cover area of said base station.
6. A system according to one of Claims 1 to 3, characterized in that said plurality of antennas of said base station are divided into a plurality of antenna groups, and the plurality of antennas in each of said antenna groups are concentrically arranged, and also said antenna groups are distributively arranged in a plurality of locations within a cover area of said base station.
7. A system according to one of Claims 1 to 6, characterized in that in said transmission antenna selecting means, the individual channels select the associated antennas independently of one another.
8. A system according to one of Claims 1 to 6, characterized in that said transmission antenna selecting means adjusts the antennas to be selected among the channels so as for the

antennas to be selected not to be concentrated on a part of said antennas.

9. A system according to one of Claims 1 to 6, characterized in that:

said multiplexing means includes a multiplexing capability corresponding to number of channels which does not exceed a smaller constant (M) than total number of channels (L) within a cover area of said base station;

said base station further comprises radio transmission/reception means provided every antenna which includes an amplification capability corresponding to the number of channels which does not exceed said constant (M); and

said transmission antenna selecting means adjusts the antennas to be selected among the channels so as for the number of channels each selecting any one of the antennas not to exceed said constant (M).

10. A system according to one of Claims 1 to 9, characterized in that said base station further comprises transmission/reception switching means (102, 202) for switching transmission/reception every antenna.

11. A mobile telecommunication system for performing communication utilizing a CDMA/TDD system adopting a direct spread method, characterized by a base station comprising:

a plurality of antennas (101, 201)

radio transmission/reception means (103, 104, 203, 204) provided every antenna;

despreading means (105, 205) for subjecting received signals, which are received by said antennas, to despread every channel;

comparison means (301, 401) for comparing correlation levels, which are obtained by the despread, with respect to said antennas every channel;

decode means (303, 403) for decoding the received signals;

spreading means (304, 404) for spreading a transmission data every channel in transmission;

transmission antenna selecting means (305, 405) for selecting an antenna from which a transmission signal, which is obtained by the spread in said spreading means, is to be transmitted outwardly every channel; and

multiplexing means (106, 206) for multiplexing the transmission signals of the associated channels, which are obtained by the spread, every antenna.

12. A system according to Claim 11, characterized in that said base station further comprises

means (302, 402) for composing the correlation levels of said antennas, which are obtained by the despread, every channel.

13. A system according to Claim 11 or 12 characterized in that said base station further comprises means (307, 407) for estimating, from changes in past values of the correlation levels of said antennas which are obtained by the despread, future values of the correlation levels every channel.

14. A system according to one of Claims 11 to 13, characterized in that all of said plurality of antennas of said base station are concentrically arranged in a central portion of a cover area of said base station.

15. A system according to one of Claims 11 to 13, characterized in that said plurality of antennas of said base station are distributively arranged in a plurality of locations within a cover area of said base station.

16. A system according to one of Claims 11 to 13, characterized in that said plurality of antennas of said base station are divided into a plurality of antenna groups, and the plurality of antennas in each of said antenna groups are concentrically arranged, and also said antenna groups are distributively arranged in a plurality of locations within a cover area of said base station.

17. A system according to one of Claims 11 to 16, characterized in that in said transmission antenna selecting means, the individual channels select the associated antennas independently of one another.

18. A system according to one of Claims 11 to 16, characterized in that said transmission antenna selecting means adjusts the antennas to be selected among the channels so as for the antennas to be selected not to be concentrated on a part of said antennas.

19. A system according to one of Claims 11 to 16, characterized in that:

said multiplexing means includes a multiplexing capability corresponding to number of channels which does not exceed a smaller constant (M) than total number of channels (L) within a cover area of said base station;

said radio transmission/reception means includes an amplification capability corresponding to the number of channels which does not exceed said constant (M); and

said transmission antenna selecting means adjusts the antennas to be selected among the channels so as for the number of channels each selecting any one of the antennas not to exceed said constant (M).

5

20. A system according to one of Claims 11 to 19, characterized in that said base station further comprises transmission/reception switching means (102, 202) for switching transmiss-

10

sion/reception every antenna.

15

20

25

30

35

40

45

50

55



FIG.1 PRIOR ART

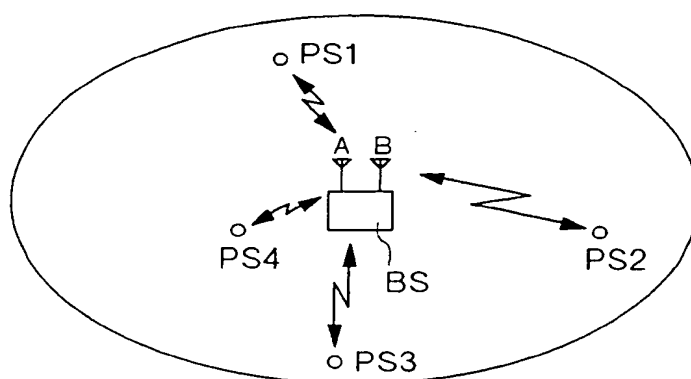


FIG.2 PRIOR ART

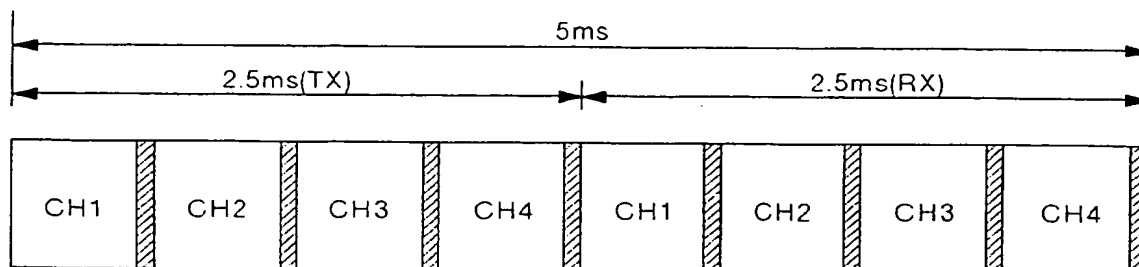


FIG.3 PRIOR ART

TIME	t0	t1	t2	t3	t4	t5
ANTENNA A	RX	TX	RX	TX	RX	TX
ANTENNA B	RX	TX	RX	TX	RX	TX
	RECEIVED POWER	SELECTED ANTENNA	RECEIVED POWER	SELECTED ANTENNA	RECEIVED POWER	SELECTED ANTENNA
CHANNEL 1	A 12	A	14	A	16	A
	B 10		11		12	
CHANNEL 2	A 12	B	15	B	18	A
	B 20		16		14	
CHANNEL 3	A 30	A	30	A	30	A
	B 12		12		15	
CHANNEL 4	A 24	B	26	A	26	A
	B 30		26		25	
ANTENNA A						
ANTENNA B						

FIG. 4

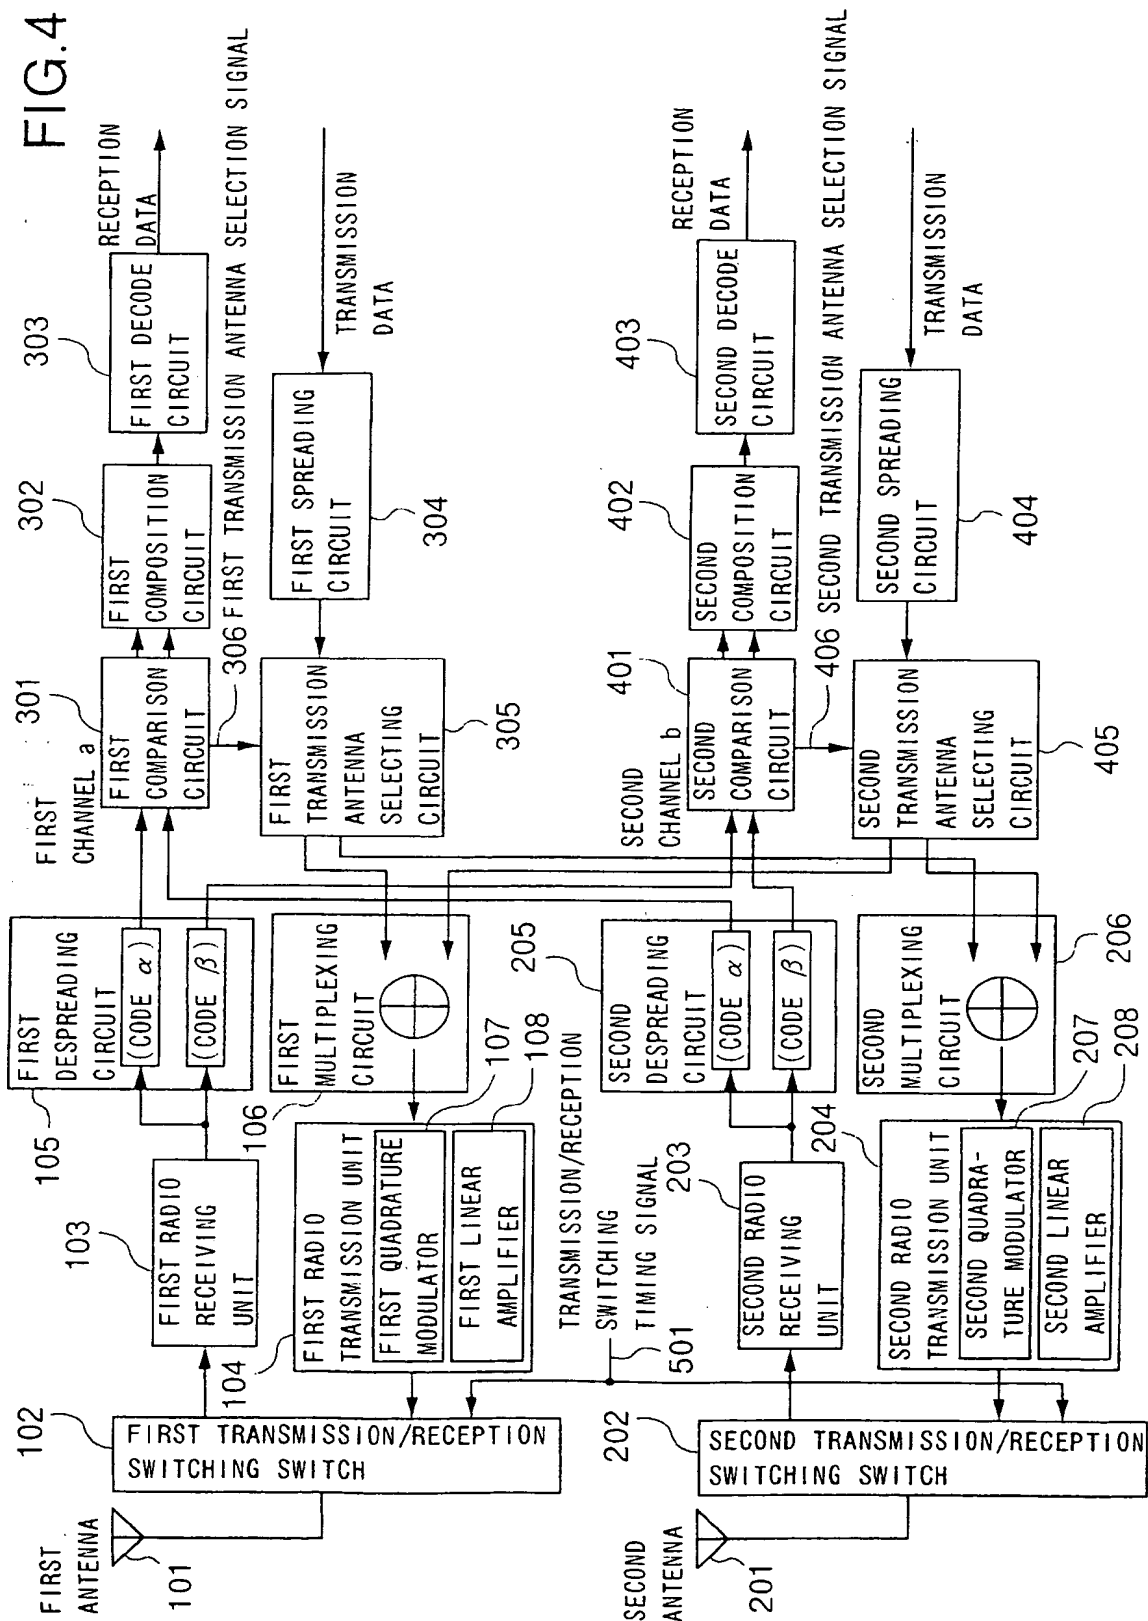


FIG.5

TIME	t0	t1	t2	t3	t4	t5
ANTENNA A	RX	TX	RX	TX	RX	TX
ANTENNA B	RX	TX	RX	TX	RX	TX
	RECEIVED POWER	SELECTED ANTENNA	RECEIVED POWER	SELECTED ANTENNA	RECEIVED POWER	SELECTED ANTENNA
CHANNEL 1	A 12	A	14	A	16	A
	B 10		11		12	
CHANNEL 2	A 12	B	15	B	18	A
	B 20		16		14	
CHANNEL 3	A 30	A	30	A	30	A
	B 12		12		15	
CHANNEL 4	A 24	B	25	B	26	A
	B 30		28		25	
ANTENNA A		CHANNEL 1,3		CHANNEL 1,3		CHANNEL 1,2,3,4
ANTENNA B		CHANNEL 2,4		CHANNEL 2,4		CHANNEL

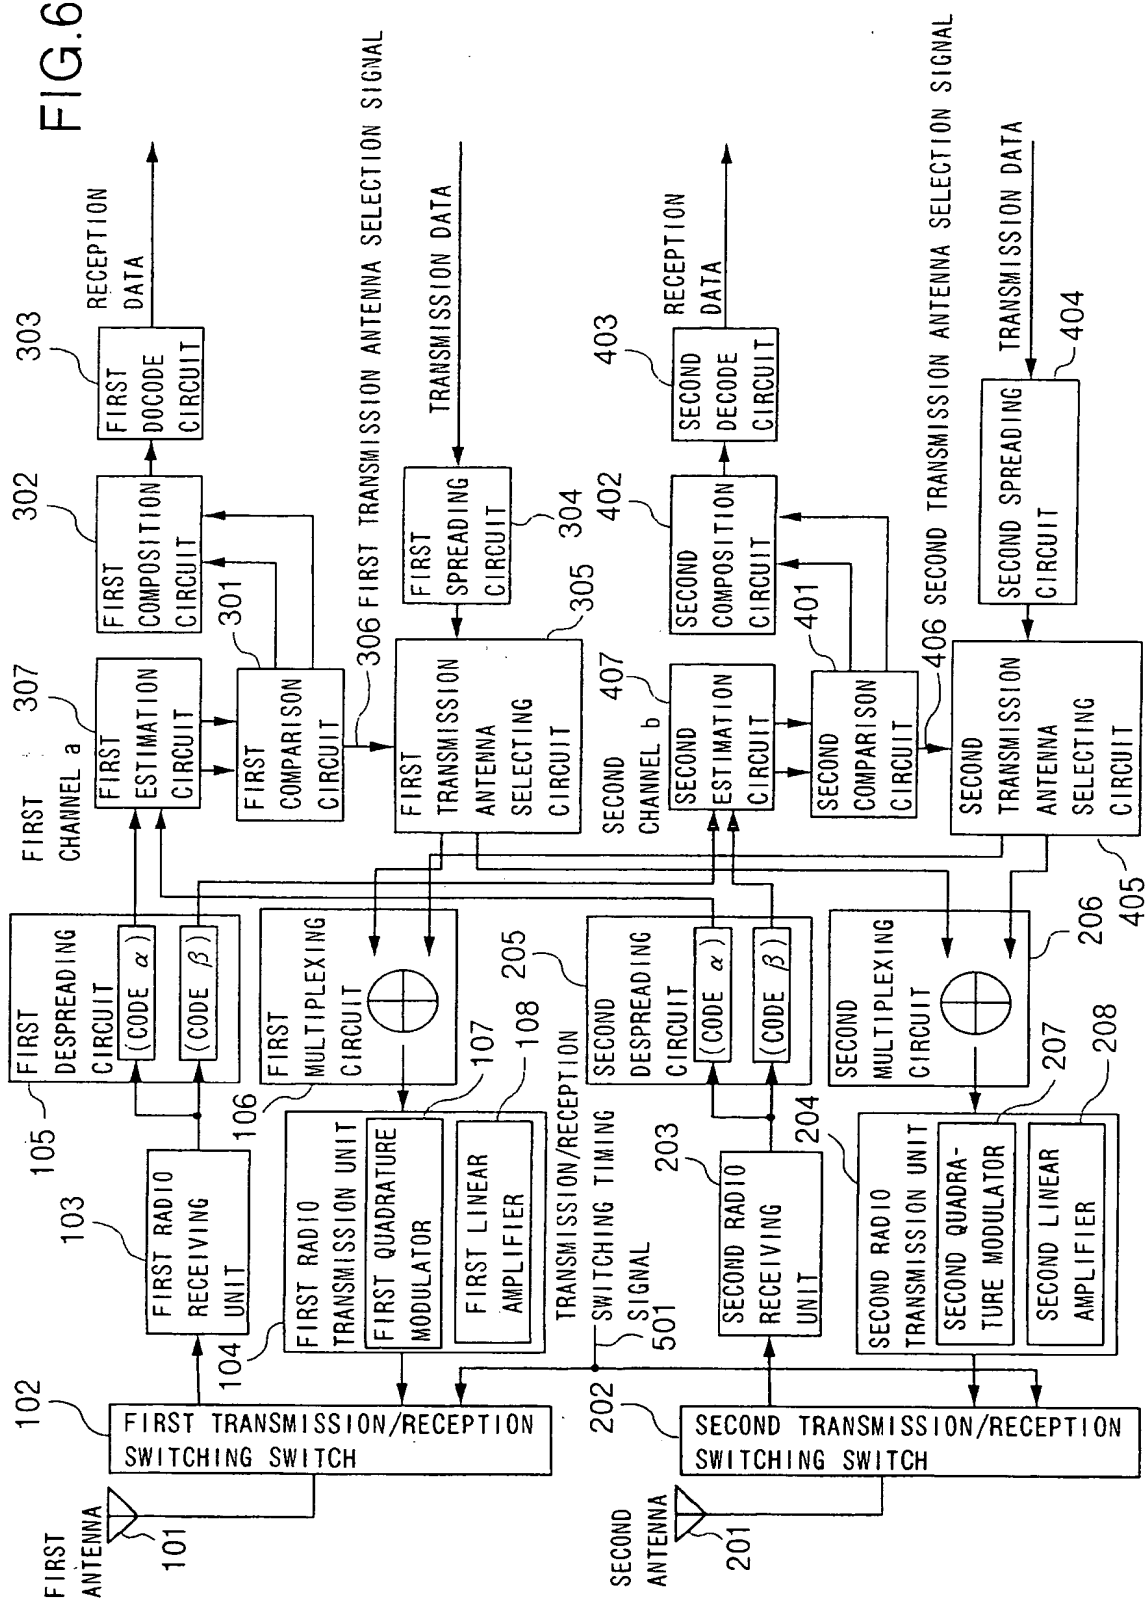


FIG.7

TIME	t0	t1	t2	t3	t4	t5
ANTENNA A	RX	TX	RX	TX	RX	TX
ANTENNA B	RX	TX	RX	TX	RX	TX
	RECEIVED POWER	ESTI- MATED VALUE	SELEC- TED ANTENNA	RECEIVED POWER	ESTI- MATED VALUE	SELEC- TED ANTENNA
CHANNEL 1	A 12	13	A	14	15	A
	B 10	10		11	11	
CHANNEL 2	A 12	14	B	15	16	A
	B 20	18		16	15	
CHANNEL 3	A 30	26	A	30	30	A
	B 12	15		12	17	
CHANNEL 4	A 24	26	B	25	26	A
	B 30	31		28	27	
ANTENNA A		CHANNEL 1,3			CHANNEL 1,2,3,4	
ANTENNA B		CHANNEL 2,4				

FIG.8

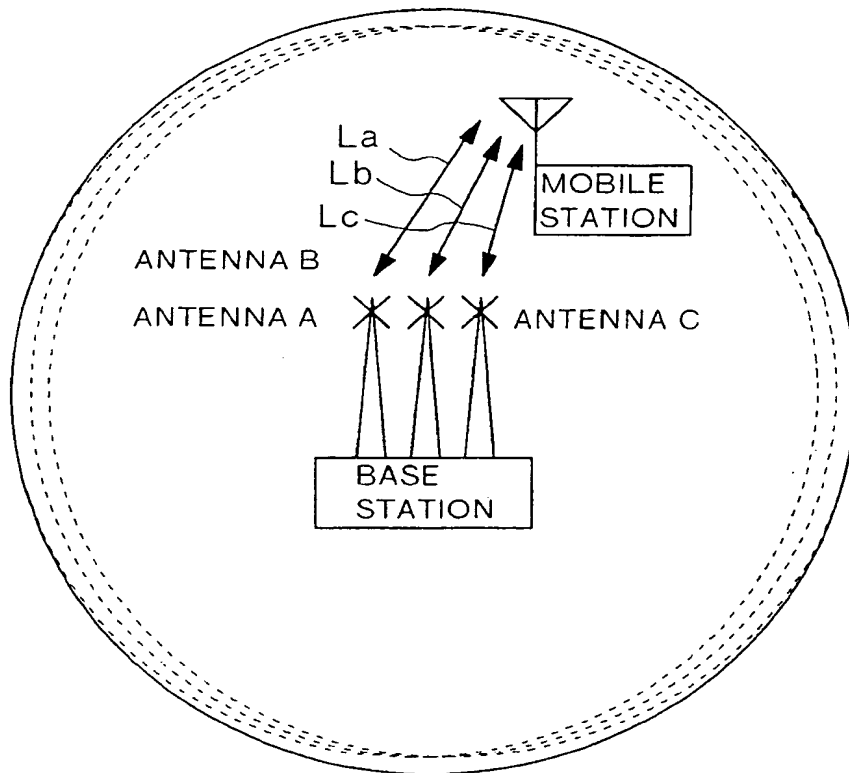


FIG.9

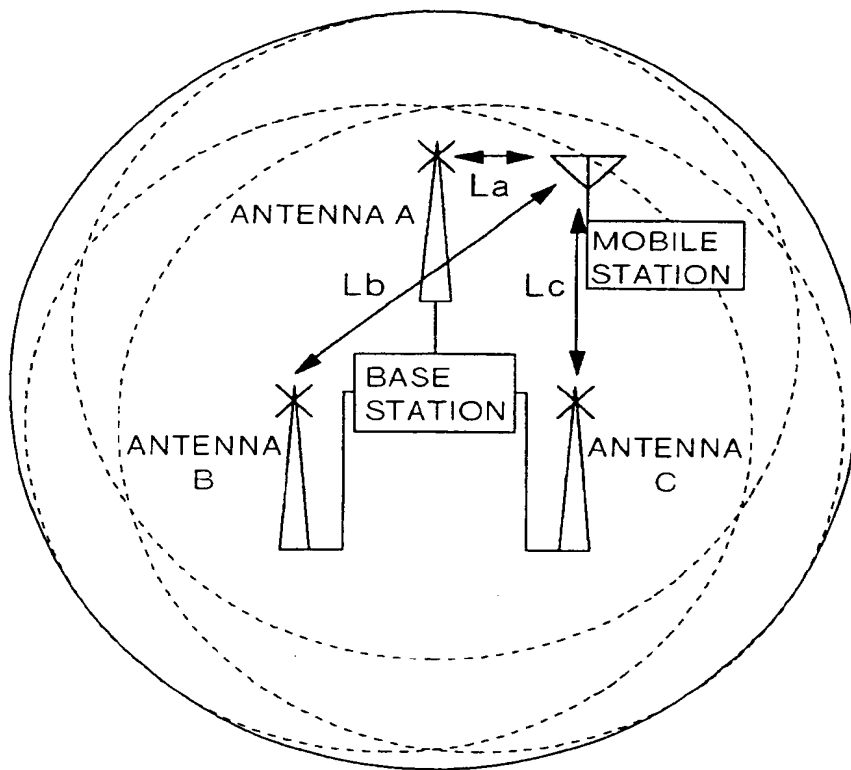
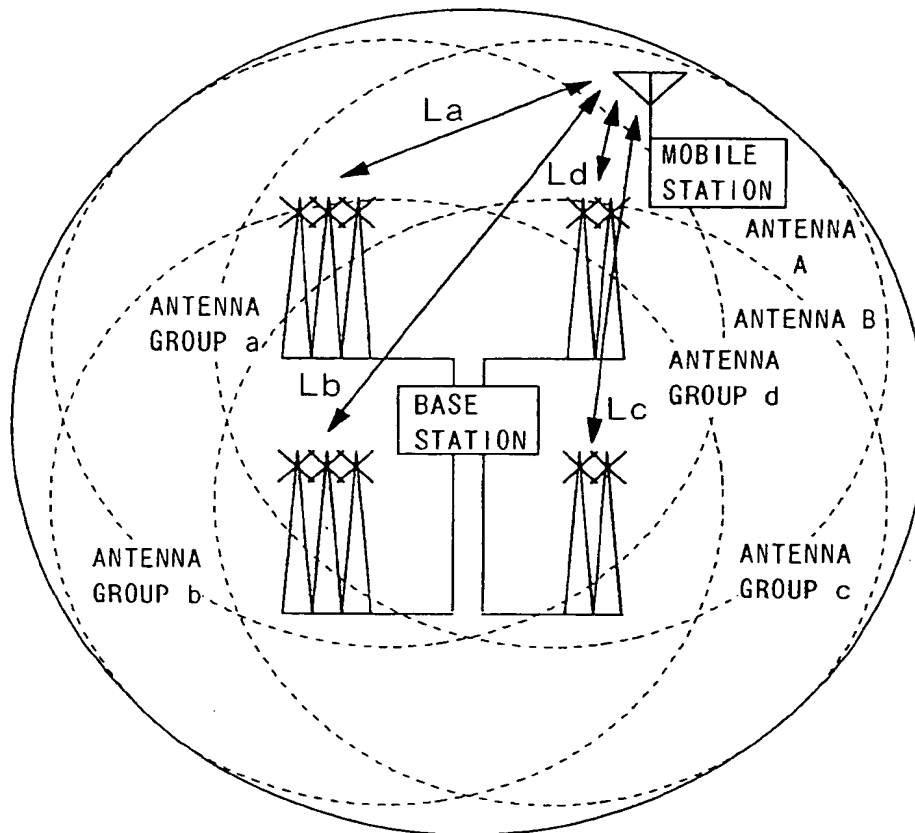




FIG.10



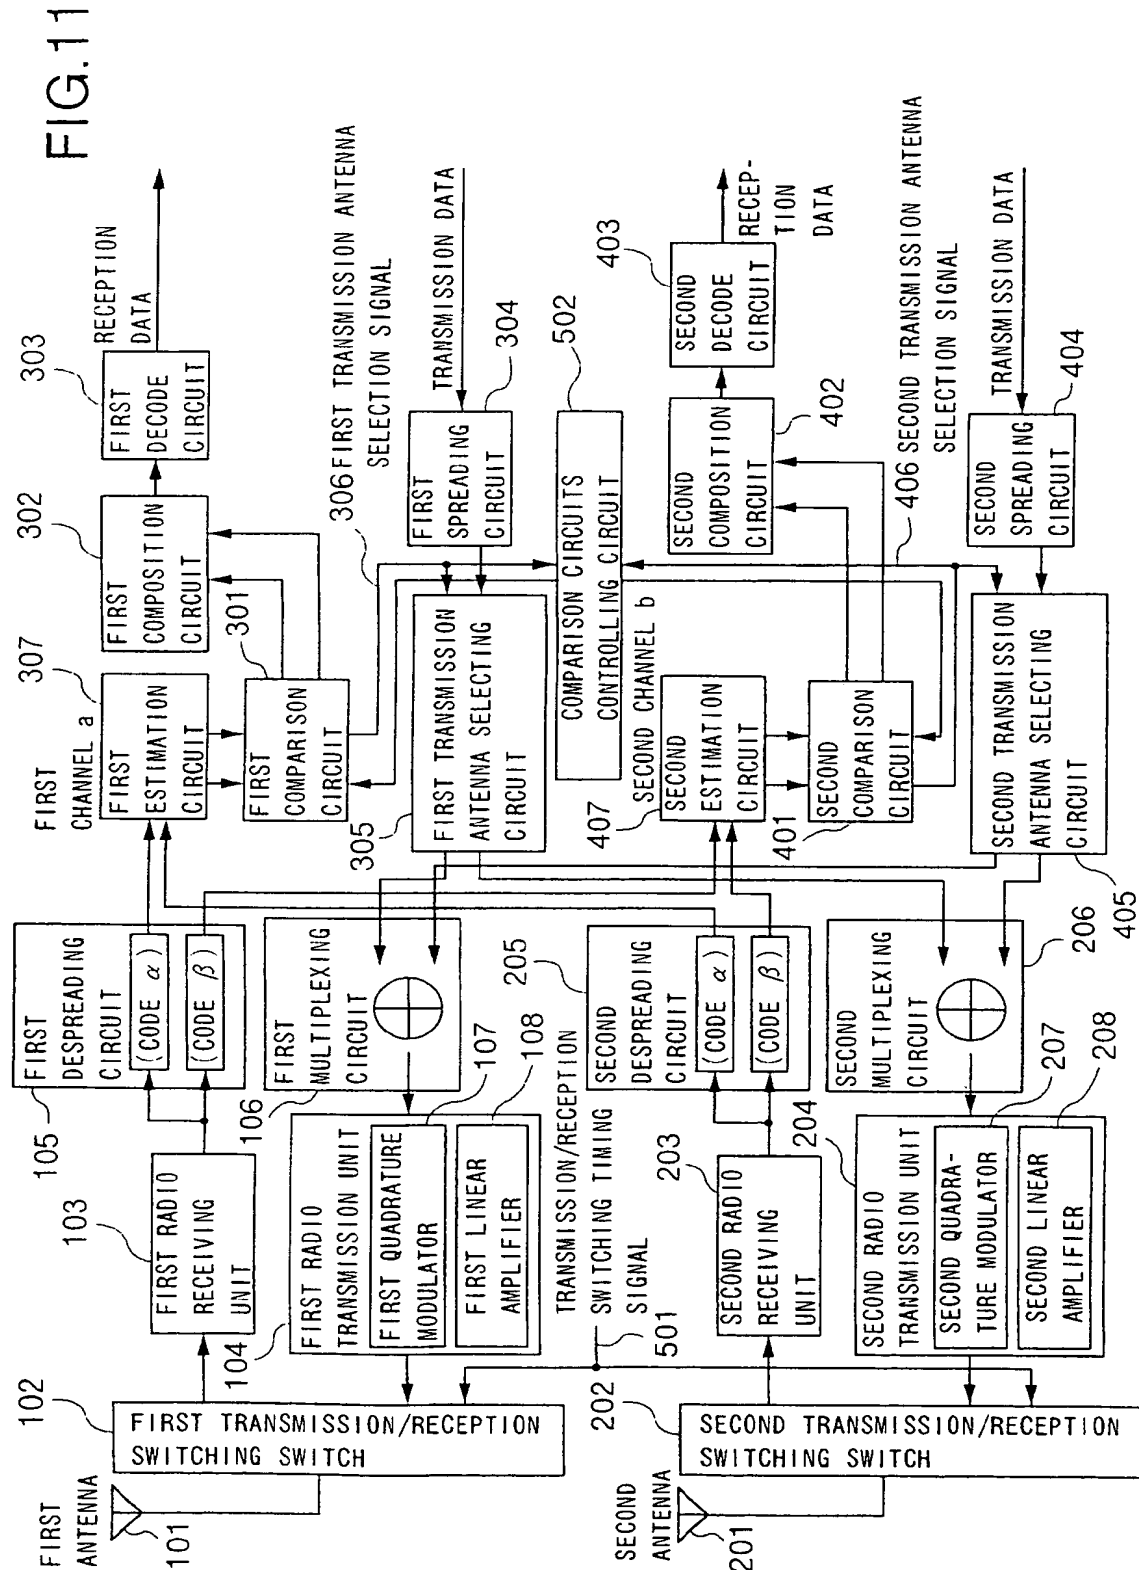


FIG.12

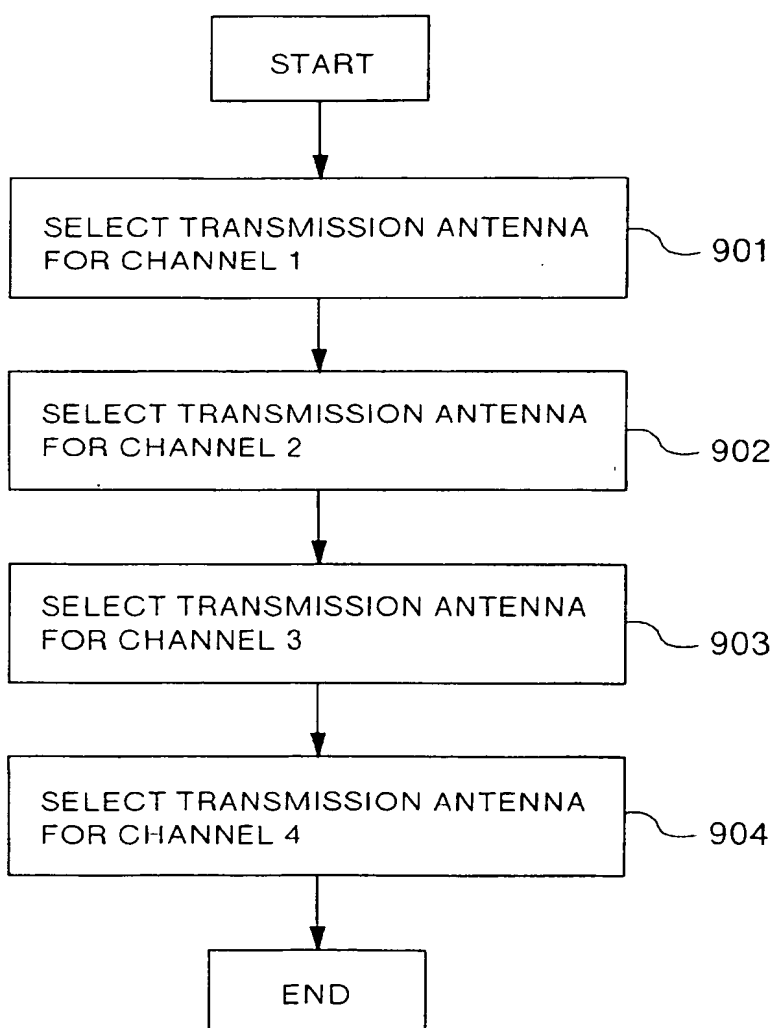


FIG.13

TIME	t0	t1	t2	t3	t4	t5
ANTENNA A	RX	TX	RX	TX	RX	TX
ANTENNA B	RX	TX	RX	TX	RX	TX
	RECEIVED POWER	ESTI-MATED VALUE	SELEC-TED ANTENNA	RECEIVED POWER	ESTI-MATED VALUE	SELEC-TED ANTENNA
CHANNEL 1	A 12	13	A	14	15	16
B	10	10		11	11	12
CHANNEL 2	A 12	14	B	15	16	18
B	20	18		16	15	13
CHANNEL 3	A 30	26	A	30	30	30
B	12	15		12	17	17
CHANNEL 4	A 24	26	B	25	26	27
B	30	31		28	25	24
ANTENNA A		CHANNEL 1,3		CHANNEL 1,2,3		CHANNEL 1,2,3
ANTENNA B		CHANNEL 2,4		CHANNEL 4		CHANNEL 4

FIG.14


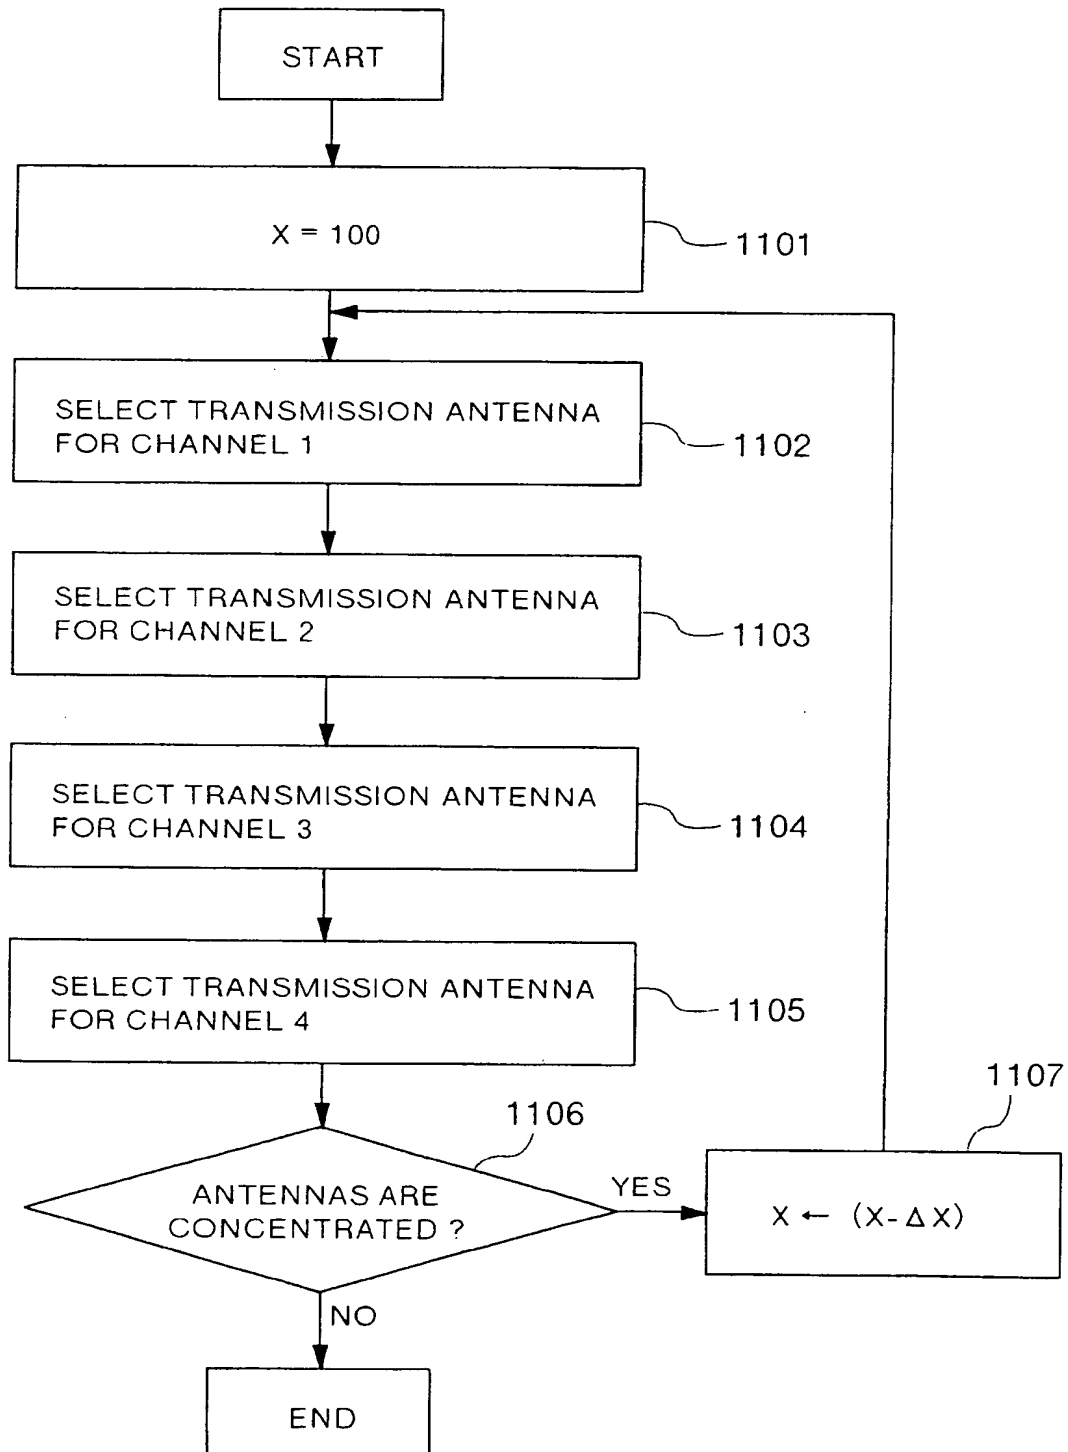


FIG.15

TIME	t0	t1	t2	t3	t4	t5
ANTENNA A	RX	TX	RX	TX	RX	TX
ANTENNA B	RX	TX	RX	TX	RX	TX
	RECEIVED POWER	ESTI-MATED VALUE	SELEC-TED ANTENNA	RECEIVED POWER	ESTI-MATED VALUE	SELEC-TED ANTENNA
A	12	13		14	15	16
B	10	10	A	11	11	12
CHANNEL 1						
A	12	14	B	15	16	18
B	20	18		15	13	14
CHANNEL 2						
A	30	26	A	30	30	30
B	12	15		12	17	15
CHANNEL 3						
A	24	26	B	25	26	26
B	30	31		28	27	25
CHANNEL 4						
ANTENNA A		CHANNEL 1,3		CHANNEL 1,3		CHANNEL 1,2
ANTENNA B		CHANNEL 2,4		CHANNEL 2,4		CHANNEL 3,4

FIG.16



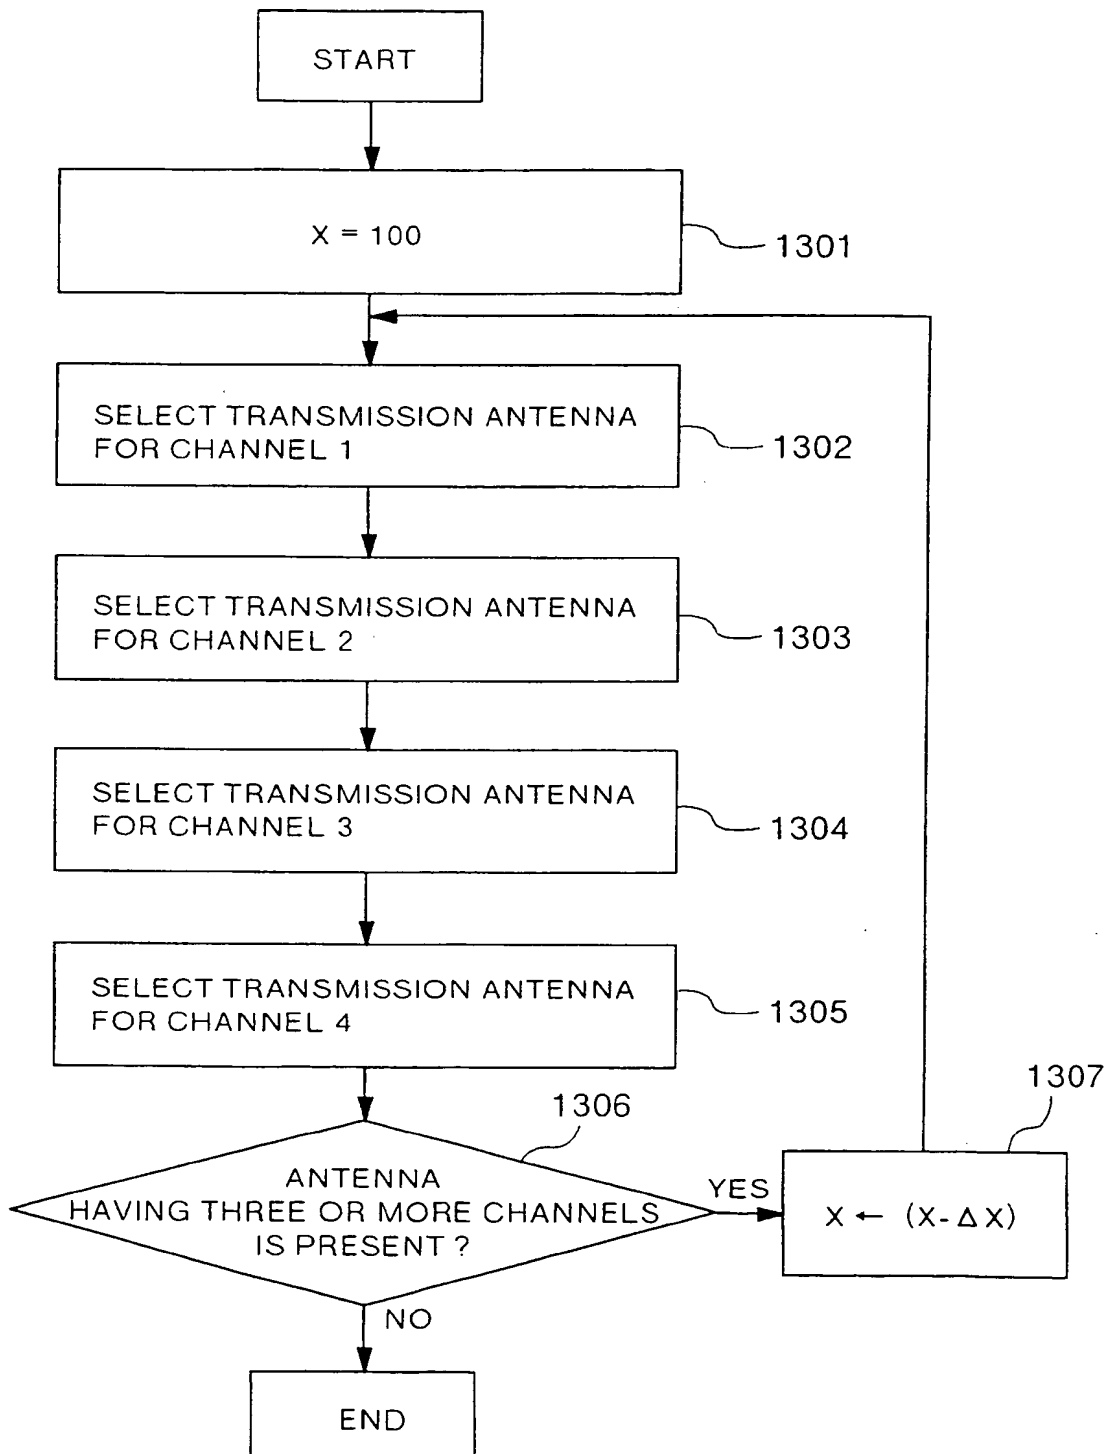

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 95 10 1796

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	43RD IEEE VEHICULAR TECHNOLOGY CONFERENCE, May 1993, SECAUCUS,US; pages 602 - 606, XP393255 Y.KONDO ET AL. 'Linear Predictive Transmitter Diversity for Microcellular TDMA/TDD Mobile Radio System.' * page 602, left column, line 14 - right column, line 10 *	1,11	H04B7/26 H04B7/06
A	IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS '93, vol.3, May 1993, GENEVA,SWITZERLAND; pages 1775 - 1779, XP448429 V.WEERACKODY 'Diversity for the Direct-sequence Spread Spectrum System using Multiple Transmit Antennas' * page 1775, left column, line 17 - right column, line 4 *	1,11	
A	WO-A-92 10890 (QUALCOMM) * claims; figures *	1,11	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04B H04L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 17 March 1995	Examiner Bischof, J-L
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure F : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.92 (P04C01)